




OUTDOOR DISPLAYS

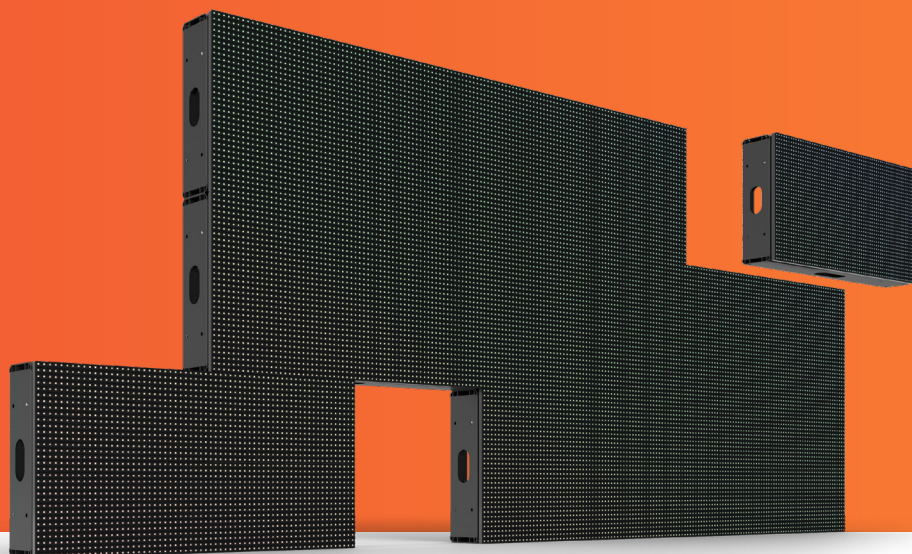

Say hello to the future of LED Displays

Introducing the all-new, redesigned Cirrus Outdoor LED Modules, the next generation in LED display technology. The culmination of over two years of research & development, this generation of outdoor display panels offers a variety of features that are industry firsts.

Drawing 45% less power than prior versions, the Cirrus Outdoor LED Modules are one of the most energy-efficient products on the market. This decrease in power consumption not only reduces utility bills month over month for sign owners, but it also dramatically reduces the installation costs by eliminating the need for additional circuits and utilities. Additionally, the decrease in power consumption increases the longevity of the product due to the reduced heat and cooler system operation.



LOWER POWER CONSUMPTION

Runs cooler, increasing the longevity of the sign



BUILT TO LAST

IP65 rated on front and back of panels



IMPROVED PERFORMANCE

Increased perceived brightness, easy to see in direct sunlight



SCREENHUB CMS

Easy to use software to manage display content



50% LIGHTER

Lighter weight makes them ideal for retrofits



FLEXIBLE CONNECTION

Includes Wifi, Ethernet, and Cellular

Co-branding here (remove gray)



PRODUCT INFORMATION

Color	281 Trillion
Resolution (pitch)	12mm / 9mm / 6mm
Brightness (NITS)	Up to 7500
Panel dimensions	24"W / 12"H / 4 1/8"D / 11.2 lbs
Module matrix	12mm 24x48 / 9mm 32x64 / 6mm 48x96
Min viewing distance	12mm 20ft / 9mm 12ft / 6mm 8ft
Viewing angle	160° Horizontal / 90° Vertical
Refresh rate	Up to 60 FPS
AC input	Universal AC input (90-264VAC input range)
Temperature rating	-40°-158° Fahrenheit
WiFi connection	TP Link long-range high power bridge (optional)
Cellular broadband	5-yr cellular broadband included
Display life span	100,000 Hours
Warranty	5-yr limited hardware / 5-yr service (optional)

INCLUDES

- High strength aluminum frames and hex bolts
- LED modules, controller, power and data cables
- ScreenHub software + training & support

Partner [Company Name]
Contact [Contact Name]
Tel (123) 456-7890
Email email@company.com
Web www.company.com